


RUNDLITZENSEIL, verzinkt, PVC-ummantelt, transparent

Nennfestigkeit mind. 1770 N/mm²
Auch in rostfrei lieferbar

Bestell-Nr.	Machart	Seil-Ø innen / außen	Mindestbruchkraft	Gewicht/m
		[mm]	[daN]	[kg]
22890004	7x7	0,6 / 1,0	30	0,004
22890008	7x7	1,0 / 1,6	70	0,006
22890009	7x7	1,0 / 1,7	70	0,006
22890012	7x7	1 / 2	70	0,007
22890014	7x7	1,5 / 2,0	180	0,016
22890016	6x7+FC	1,5 / 2,2	180	0,018
22890018	6x7+FC	1,5 / 2,5	180	0,018
22890020	6x7+FC	1,8 / 2,5	200	0,02
22890022	6x7+FC	2 / 3	230	0,02
22890023	6x7+FC	2 / 4	230	0,02
22890025	6x7+FC	2,5 / 3,5	380	0,03
22890030	6x7+FC	3 / 4	530	0,04
22890031	6x7+FC	3 / 5	530	0,05
22890032	6x7+FC	3 / 6	530	0,05
22890034	6x7+FC	3 / 8	530	0,05
22890035	6x7+FC	3,5 / 4,5	740	0,05
22890040	6x7+FC	4 / 5	940	0,07
22890042	6x7+FC	4 / 6	940	0,07
22890050	6x7+FC	5 / 6	1300	0,11
22890052	6x19+FC	5 / 7	1300	0,12
22890060	6x19+FC	6 / 8	1960	0,16
22890080	6x19+FC	8 / 10	3480	0,26
22890100	6x19+FC	10 / 12	5440	0,40
22890120	6x19+FC	12 / 14	7830	0,56

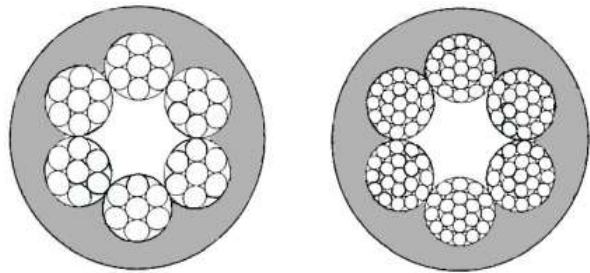

Ummantelung aus Polyamid, Polyäthylen, Polypropylen oder andere Abmessungen / Farben auf Anfrage.

NEUMANN GMBH Hebesysteme Fördertechnik	Paul-Ehrlich-Straße 5a 63128 Dietzenbach	Tel. 06074 8504-0 Fax 06074 850412	E-Mail info@neumann-gmbh.com www.neumann-gmbh.com
--	--	---	--