


Spannschloss DIN 82004 mit Langaugen galv. Verzinkt

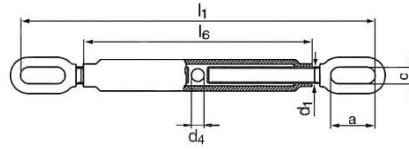

Bestell-Nr.	Tragfähigkeit [t]	Abmessungen						Gewicht ca. [kg]
		d ₁	d ₄	l ₆	a	c	l ₁	
29030001	0,40	M 12	12	180	29	13	305- 445	0,75
29030002	0,60	M 16	12	200	48	21	366- 516	1,41
29030003	1,00	M 18	12	220	48	21	385- 550	1,72
29030004	1,60	M 22	14	240	58	26	460- 630	2,85
29030005	2,00	M 24	14	260	58	26	470- 660	3,61
29030006	2,50	M 27	14	280	72	32	536- 736	5,23
29030007	3,15	M 30	18	300	72	32	556- 766	6,40
29030008	4,00	M 33	18	320	94	40	631- 856	9,00
29030009	5,00	M 36	18	340	94	40	651- 886	10,30
29030010	6,30	M 42	22	380	108	45	724- 984	13,00
29030011	8,00	M 45	22	420	115	49	785-1080	19,50
29030012	10,00	M 52	22	460	125	54	965-1180	27,00
29030013	12,50	M 56	26	500	144	60	995-1340	37,00
29030014	16,00	M 64	26	540	163	66	1055-1420	53,40

NEUMANN GMBH
Hebesysteme Fördertechnik

Paul-Ehrlich-Straße 5a
63128 Dietzenbach

Tel. 06074 8504-0
Fax 06074 850412

E-Mail info@neumann-gmbh.com
www.neumann-gmbh.com